

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 March 2002 (28.03.2002)

PCT

(10) International Publication Number
WO 02/24316 A1

(51) International Patent Classification⁷: **B01F 3/06**,
B08B 4/00, B24C 1/00

268-1 Geruk-ri, Miyang-myon, Ansong-shi, Kyonggi-do
456-843 (KR).

(21) International Application Number: PCT/KR01/01575

(74) Agent: **KIM, Kyung-Cheol**; SeShin Patent & Law Firm,
8th Fl., KFSB Bldg., 16-2 Yeoeudo-dong, Yeongde-
ungpo-gu, Seoul 150-010 (KR).

(22) International Filing Date:
19 September 2001 (19.09.2001)

(81) Designated States (*national*): CN, JP, US.

(25) Filing Language: Korean

(84) Designated States (*regional*): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE, TR).

(26) Publication Language: English

(30) Priority Data:
2000/0054910 19 September 2000 (19.09.2000) KR

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments


(71) Applicant (*for all designated States except US*):
K.C.TECH CO., LTD. [KR/KR]; 268-1 Geruk-ri,
Miyang-myon, Ansong-shi, Kyonggi-do 456-843 (KR).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **KIM, Se-Ho** [KR/KR];

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: SYSTEM FOR FORMING AEROSOLS AND COOLING DEVICE INCORPORATED THEREIN

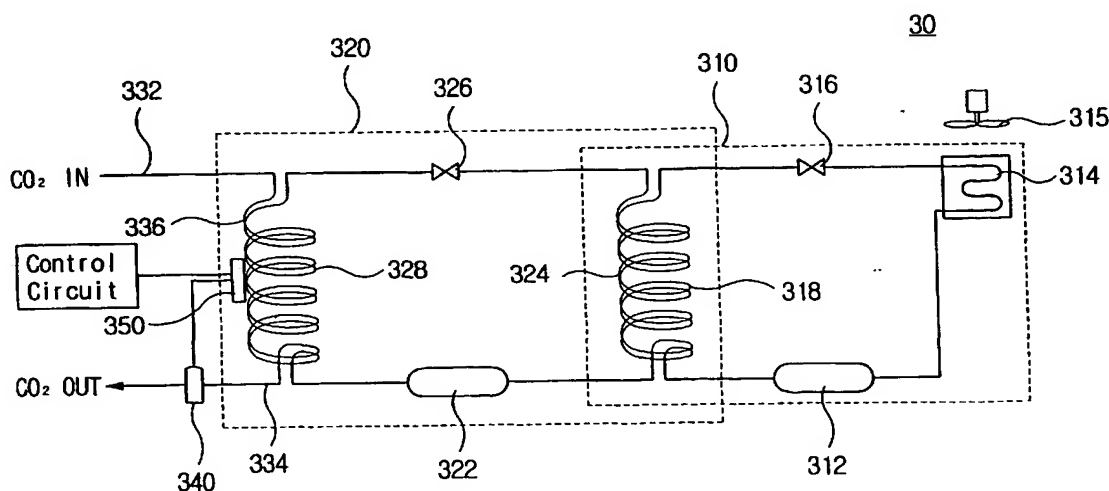

(57) Abstract: The present invention relates to a cooling device (30) of the reverse Carnot cycle-type using a refrigerant, and an aerosol generation system including it. The cooling device (30) includes a refrigerator (310, 320) of the reverse Carnot cycle-type, a cleaning medium conduit (120), a temperature sensor (130), and a heater (140). The intermediate portion of the cleaning medium conduit and the evaporator are wound like a coil in the same configuration so as to maximize the contacting area therebetween. The temperature sensor (130) measures the temperature of the carbon dioxide discharged from the cooling device (30), and the heater (140) is arranged to contact the evaporator of the refrigerator and the intermediate portion of the cleaning medium conduit so as to precisely adjust the liquefying rate of the carbon dioxide according to the temperature measured by the temperature sensor. The carbon dioxide is refrigerated at a temperature in the range of -80°C to -100°C through the cooling device (30), transformed into liquid phase.

SYSTEM FOR FORMING AEROSOLS AND COOLING DEVICE INCORPORATED THEREIN

TECHNICAL FIELD OF THE INVENTION

5 The present invention relates to a system for generating an aerosol and a cooling device incorporated therein, and more particularly to a CO₂ aerosol generation system for providing a jet of a CO₂ aerosol consisting of solid fine particles of frozen CO₂.

BACKGROUND OF THE ART

10 Physical or chemical contamination is very detrimental to miniaturized electronic devices such as LCD, conductive thin film, and integrated circuit. As the size of such a microelectronic device is more compactly reduced, the contamination due to dust is a great factor adversely contributing to the yield rate and defective proportion of
15 production. This augments the necessity of cleaning microelectronic devices.

 In order to resolve such problems, there have been proposed various methods of cleaning microelectronic surfaces.

20 U. S. Pat. No. 5,294,261 discloses a system for cleaning microelectronic surfaces using an Ar or N₂ aerosol as a cleaning medium. This system provides a process for cleaning microelectronic surfaces comprising the steps of refrigerating highly pure and highly pressurized argon and nitrogen to a temperature in the range of –160°C to –200°C so as to form a cryogenic substance, expanding the cryogenic
25 substance at a low pressure by passing through a nozzle or valve to thereby generate an

aerosol consisting of fine solid particles, and making the aerosol impinge upon the microelectronic surfaces. In this case, the argon and nitrogen as cleaning mediums should be cooled down to a very low temperature, which are hardly maintained at solid phase in the atmosphere because of high temperature difference, and therefore the cleaning process must be performed mostly in a vacuum.

Another U. S. Pat. No. 5,486,132 discloses a system for cleaning microelectronic surfaces using a CO₂ aerosol as a cleaning medium. In this case, the carbon dioxide as the cleaning medium is refrigerated by a cooling device to a relatively higher temperature in the range of -80°C to -100°C.

The cooling device used in the above-mentioned systems include a heat exchanger containing liquefied nitrogen as the refrigerant with a temperature of -198°C or less, through which the cleaning medium is refrigerated. Such cooling device employing the liquefied nitrogen suffers a drawback that the cleaning medium may be over-refrigerated because of difficulties in temperature control. If the cleaning medium is over-refrigerated, it may be solidified before being expanded after passing through the heat exchanger and block the passageway of the conduit and the nozzle. In order to prevent such event increased is the pressure of the cleaning medium, but it increases consumption of the cleaning medium. Moreover, the cooling device requires liquefied nitrogen to be continuously supplied to the heat exchanger, resulting in consumption of a great amount of liquefied nitrogen.

TECHNICAL SOLUTION OF THE INVENTION

In order to resolve the above mentioned problems is employed a cooling device

of the reverse Carnot cycle-type using a single or mixed gas refrigerant, wherein the refrigerant is cycled through the processes of adiabatic compression by the compressor, condensation by the condenser, adiabatic expansion by the expansion valve, and evaporation by the evaporator. In this case, the cleaning medium is refrigerated by being
5 deprived of heat by the refrigerant in the evaporator.

It is an object of the present invention to provide a cooling device of the reverse Carnot cycle-type using a refrigerant, and an aerosol generation system including it.

10 It is another object of the present invention to provide a cooling device of the reverse Carnot cycle-type using two different refrigerants for two-stage cooling, and an aerosol generation system including it.

According to one aspect of the present invention, a cooling device comprises
15 an evaporator wound like a coil for flowing a refrigerant made to have low temperature and low pressure through a compressor, condenser and expansion valve; a cleaning medium conduit, for flowing a cleaning medium, consisting of an inlet and outlet and an intermediate portion wound like a coil along the evaporator; a temperature sensor arranged in the outlet of the cleaning medium conduit for measuring the temperature of
20 the cleaning medium discharged; and a heater controlled according to the temperature measured by the temperature sensor.

According to another aspect of the present invention, a cooling device comprises a first evaporator wound like a coil for flowing a first refrigerant passed
25 through a first compressor, first condenser and first expansion valve; a second

evaporator wound like a coil for flowing a second refrigerant passed through a second compressor, second condenser and second expansion valve, wherein the second condenser disposed through the first evaporator; a cleaning medium conduit consisting of an inlet and outlet and intermediate portion wound like a coil along the second evaporator for flowing a cleaning medium; a temperature sensor arranged in the outlet of the cleaning medium conduit for measuring the temperature of the cleaning medium discharged; and a heater controlled according to the temperature measured by the temperature sensor.

According to still another aspect of the present invention, an aerosol generation system comprises a cleaning medium source for supplying a cleaning medium, carrier gas source for supplying a carrier gas, a cooling device for refrigerating the cleaning medium supplied from the cleaning medium source, and a nozzle for ejecting a mixture of the cleaning medium and the carrier gas, respectively, supplied from the cooling device and the carrier gas source.

According to an embodiment of the present invention, the cleaning medium is a carbon dioxide.

According to an embodiment of the present invention, the cleaning medium is refrigerated in the intermediate portion of the cleaning medium conduit thereby being transformed into a liquid phase.

According to an embodiment of the present invention, the heater is so arranged as to contact the evaporator or the intermediate portion of the cleaning medium conduit.

According to an embodiment of the present invention, the phase-transition rate of the cleaning medium is adjusted by the heater.

5 According to an embodiment of the present invention, the intermediate portion of the cleaning medium conduit is disposed inside the evaporator with extending of the same configuration as the evaporator.

 According to an embodiment of the present invention, the intermediate portion
10 of the cleaning medium conduit is arranged to surround the evaporator with extending of the same configuration as the evaporator.

 According to an embodiment of the present invention, the cleaning medium is refrigerated to a temperature in the range of -80°C to -100°C in the intermediate
15 portion of the cleaning medium conduit.

 According to an embodiment of the present invention, the refrigeration rate of the second refrigerant is higher than that of the first refrigerant.

20 **BRIEF DESCRIPTION OF THE DRAWINGS**

 Fig. 1 is a block diagram for illustrating an aerosol generation system according to the present invention;

 Fig. 2 is a diagram for illustrating a cooling device according to an embodiment of the present invention;

25 Fig. 3 is a diagram for illustrating a cooling device according to another

embodiment of the present invention; and

Figs. 4A to 4C are cross sectional views for illustrating an evaporator shaped like a coil and the intermediate portion of a cleaning medium conduit in a cooling device according to various embodiments of the present invention.

5

PREFERRED EMBODIMENTS OF THE INVENTION

Fig. 1 illustrates the structure of an aerosol generation system according to an embodiment of the present invention, which comprises a cleaning medium source 10, carrier gas source 20, nozzle 50, and cooling device 30.

10

The cleaning medium source 10 stores a cleaning medium. For the cleaning medium is preferably used carbon dioxide (CO₂) or argon (Ar) of high purity. To be brief description, the present invention is described herebelow with a reference to carbon dioxide. The carbon dioxide is supplied from the cleaning medium source 10 through a first conduit 14 to the cooling device 30.

15

Referring to Fig. 2, the cooling device 30 comprises a refrigerator 110 of the reverse Carnot cycle-type which is connected to a compressor 112, condenser 114, expansion valve 116 and evaporator 118 by a refrigerant conduit for circulating a refrigerant, a cleaning medium conduit 120 having an inlet 122 and outlet 124 and intermediate portion 126 passing through the evaporator 118 for flowing the carbon dioxide, a temperature sensor 130 and a heater 140.

20

Working the refrigerator 110, the refrigerant is supplied as dry saturated vapor to the compressor 112 to generate adiabatically compressed overheated vapor and is

25

then condensed through the condenser 114 to turn into a saturated condensate. The condensation of the refrigerant is performed by means of atmosphere enhanced by an adjacent fan 115. Thereafter, the saturated condensate is adiabatically expanded by passing through the expansion valve 116 to produce a wet saturated vapor and in turn
5 passed through the evaporator 118 to be evaporated by absorbing the heat of the carbon dioxide flowing through the intermediate portion 126 of the cleaning medium conduit 120.

Thus, the gaseous carbon dioxide coming into the inlet 122 of the cleaning
10 medium conduit 120 is refrigerated through the intermediate portion 126, partially transformed into liquid phase. The rate of the carbon dioxide being transformed into liquid phase is expedited by extending the intermediate portion 126 of the cleaning medium conduit 120 along the coil-shaped evaporator 118 in the same configuration to maximize the contacting time between them. There are various ways to contact the
15 intermediate portion 126 of the cleaning medium conduit 120 to the evaporator 118 with considering the contacting area. Figs. 4A to 4C are cross sectional views for illustrating the ways of contacting the intermediate portion 126 of the cleaning medium conduit 120 and the evaporator 118 according to various embodiments of the present invention. Referring to Fig. 4A, the intermediate portion 126 of the cleaning medium conduit 120
20 may be a single tube arranged to be surrounded by the evaporator 118. On the contrary, the intermediate portion 126 of the cleaning medium conduit 120 may be a single tube arranged to surround the outside of the evaporator 118. Alternatively, the intermediate portion 126 of the cleaning medium conduit 120 may be a plurality of tubes arranged to contact the outside of the evaporator 118. Preferably, the evaporator 118 of the
25 refrigerator 110 and the intermediate portion 126 of the cleaning medium conduit 120

are insulated from the outside by means of an insulation material such as polyurethane.

Referring to Fig. 2, the carbon dioxide passing through the intermediate portion 126 of the cleaning medium conduit 120 is discharged through the outlet 124 to the outside of the cooling device 30. According to the present invention, the temperature of the carbon dioxide discharged through the outlet 124 of the cleaning medium conduit 120 to the outside of the cooling device 30 is controlled at a temperature in the range of -80°C to -100°C .

The temperature sensor 130 is arranged in the outlet 124 of the cleaning medium conduit 120 to sense the temperature of the discharged carbon dioxide. The heater 140 is arranged in the outside of the intermediate portion 126 of the cleaning medium conduit 120 and the evaporator 118 to precisely control the liquefying rate of the carbon dioxide. The temperature of the carbon dioxide detected by the temperature sensor 130 is applied to a control circuit to control the operation of the heater 140, so that the ratio between the gas and liquid in the cleaning medium refrigerated near the liquefying point, namely, the liquefying rate of the carbon dioxide, may be adjusted, thus more precisely controlling both the amount and the particle size of an aerosol generated from the nozzle.

Referring to Fig. 3 for illustrating the cooling device 30 according to a second embodiment of the present invention, two-stage cooling system is employed including a first refrigerator 310 and second refrigerator 320, compared with the first embodiment. The first and second refrigerators 310 and 320 are of reverse Carnot cycle-type, respectively comprising compressors 312 and 322, condensers 314 and 324, expansion

valves 316 and 326, and evaporators 318 and 328. The first refrigerator 310 uses a first refrigerant R404 while the second refrigerator 320 uses a second refrigerant R32 with a refrigeration rate higher than the first refrigerant R404. In the first refrigerator 310, the condensation of the first refrigerant is achieved by the atmosphere, expedited by a fan 315 adjacent to the condenser 314. The first evaporator 318 of the first refrigerator 310 is wound like a coil. The second condenser 324 of the second refrigerator 320 is so arranged as to pass through the first evaporator 318 of the first refrigerator 310. Thus, the second refrigerant circulating through the second refrigerator 320 is condensed by exchanging heat with the first refrigerant circulating in the first refrigerator 310. The first refrigerant passing through the first expansion valve 316 is refrigerated at a temperature in the range of -40°C to -50°C . Hence, the second refrigerant of the second refrigerator 320 passing through the first evaporator 318 of the first refrigerator 310 is refrigerated at a temperature in the range of -40°C to -50°C , which in turn passes through the second expansion valve 326 finally refrigerated at a temperature in the range of -80°C to -100°C . The carbon dioxide is refrigerated at a temperature in the range of -80°C to -100°C by exchanging heat with the second refrigerant in the second evaporator 328 of the second refrigerator 320. The other parts of the structure and operation of the cooling device 30 according to the second embodiment are similar to those of the first embodiment.

Referring to Fig. 1, the carbon dioxide passing through the cooling device 30 is supplied through a flow regulator 42 to the nozzle 50. The flow regulator 42 regulates the amount of the carbon dioxide supplied to the nozzle 50.

The carrier gas source 20 stores a carrier gas for carrying the cleaning medium at high speed. The carrier gas is supplied from the carrier gas source 20 through a

pressure regulator 44 and flow regulator 46 to the nozzle 50. The carrier gas may be selected among air, nitrogen (N₂), and argon (Ar), and preferably nitrogen (N₂). The pressure of the nitrogen supplied to the nozzle 50 is regulated at an optimum value in the range of 40Psi to 160Psi, that may solidify the carbon dioxide.

5

The supplied carbon dioxide and nitrogen are mixed ejected through the nozzle 50 of venturi-type. The carbon dioxide passing through the nozzle 50 of venturi-type is refrigerated due to Joule-Thomson effect, transformed into fine particles of solid phase, which constitute an aerosol ejected at high pressure to clean the microelectronic surfaces.

10

While the present invention has been described in connection with specific embodiments accompanied by the attached drawings, it will be readily apparent to those skilled in the art that various changes and modifications may be made thereto without departing the gist of the present invention. Therefore, the full scope of the present invention should be ascertained from the claims that follow.

15

WHAT IS CLAIMED IS:

1. A cooling device comprising;

an evaporator wound like a coil for flowing a refrigerant made to have low temperature and low pressure through a compressor, condenser, and expansion valve;

5 a cleaning medium conduit consisting of an inlet and outlet and intermediate portion wound like a coil along said evaporator for flowing a cleaning medium;

a temperature sensor arranged in the outlet of said cleaning medium conduit for measuring the temperature of the cleaning medium discharged; and

a heater controlled according to the temperature measured by said temperature.

10

2. A cooling device comprising:

a first evaporator wound like a coil for flowing a first refrigerant passed through a first compressor, first condenser, and first expansion valve;

a second evaporator wound like a coil for flowing a second refrigerant passed
15 through a second compressor, second condenser arranged through said first evaporator, and second expansion valve;

a cleaning medium conduit consisting of an inlet and outlet and intermediate portion wound like a coil along said second evaporator for flowing a cleaning medium;

a temperature sensor arranged in the outlet of said cleaning medium conduit for
20 measuring the temperature of the cleaning medium discharged; and

a heater controlled according to the temperature measured by said temperature.

3. A cooling device as defined Claim 1 and 2, wherein said cleaning medium is carbon dioxide.

25

4. A cooling device as defined Claim 1 and 2, wherein said cleaning medium is refrigerated in the intermediate portion of said cleaning medium conduit transformed into liquid phase.

5 5. A cooling device as defined Claim 1 and 2, wherein the intermediate portion of said cleaning medium conduit is formed of a single tube disposed inside the evaporator in the same configuration as the evaporator.

6. A cooling device as defined Claim 1 and 2, wherein the intermediate portion of said cleaning medium conduit is formed of a single tube surrounding the evaporator
10 in the same configuration as the evaporator.

7. A cooling device as defined Claim 1 and 2, wherein the intermediate portion of said cleaning medium conduit is formed of a plurality of tubes so arranged as to contact and extend along the outside of the evaporator in the same configuration as the
15 evaporator.

8. A cooling device as defined Claim 1, wherein said cleaning medium is refrigerated at a temperature in the range of -80°C to -100°C by heat-exchanging with the evaporator in the intermediate portion of said cleaning medium conduit.
20

9. A cooling device as defined Claim 2, wherein the refrigeration rate of the second refrigerant is higher than that of the first refrigerant.

10. A cooling device as defined in Claim 9, wherein the second refrigerant is
25 refrigerated at a temperature in the range of -40°C to -50°C by heat-exchanging with

the first evaporator in the second condenser, and the cleaning medium is refrigerated at a temperature in the range of -80°C to -100°C by heat-exchanging with the second evaporator in the intermediate portion of the cleaning medium conduit.

5 11. An aerosol generation system including the cooling device as defined in Claim 1, further includes a cleaning medium source for supplying the cleaning medium to said cooling device, a carrier gas source for supplying a carrier gas, and a nozzle for ejecting a mixture of the cleaning medium and the carrier gas respectively supplied from said cooling device and carrier gas source.

10

12. An aerosol generation system including the cooling device as defined in Claim 2, further includes a cleaning medium source for supplying the cleaning medium to said cooling device, a carrier gas source for supplying a carrier gas, and a nozzle for ejecting a mixture of the cleaning medium and the carrier gas respectively supplied from
15 said cooling device and carrier gas source.

1 / 5

FIG. 1



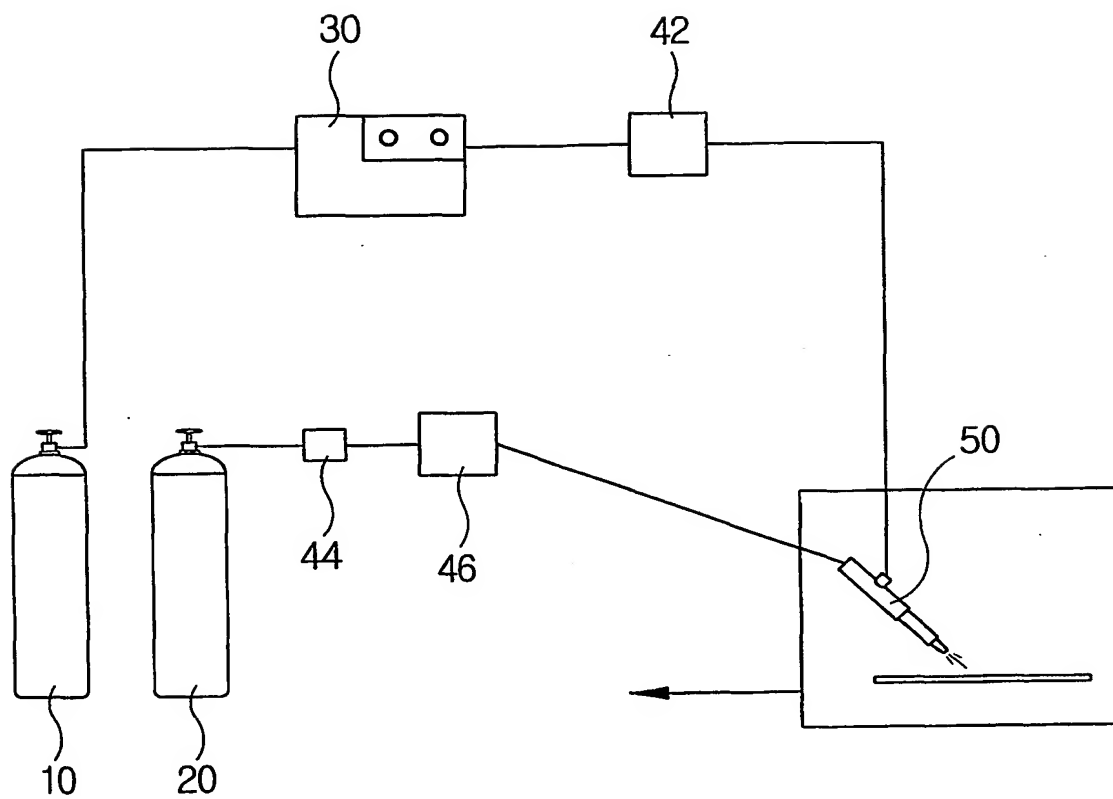


FIG.2

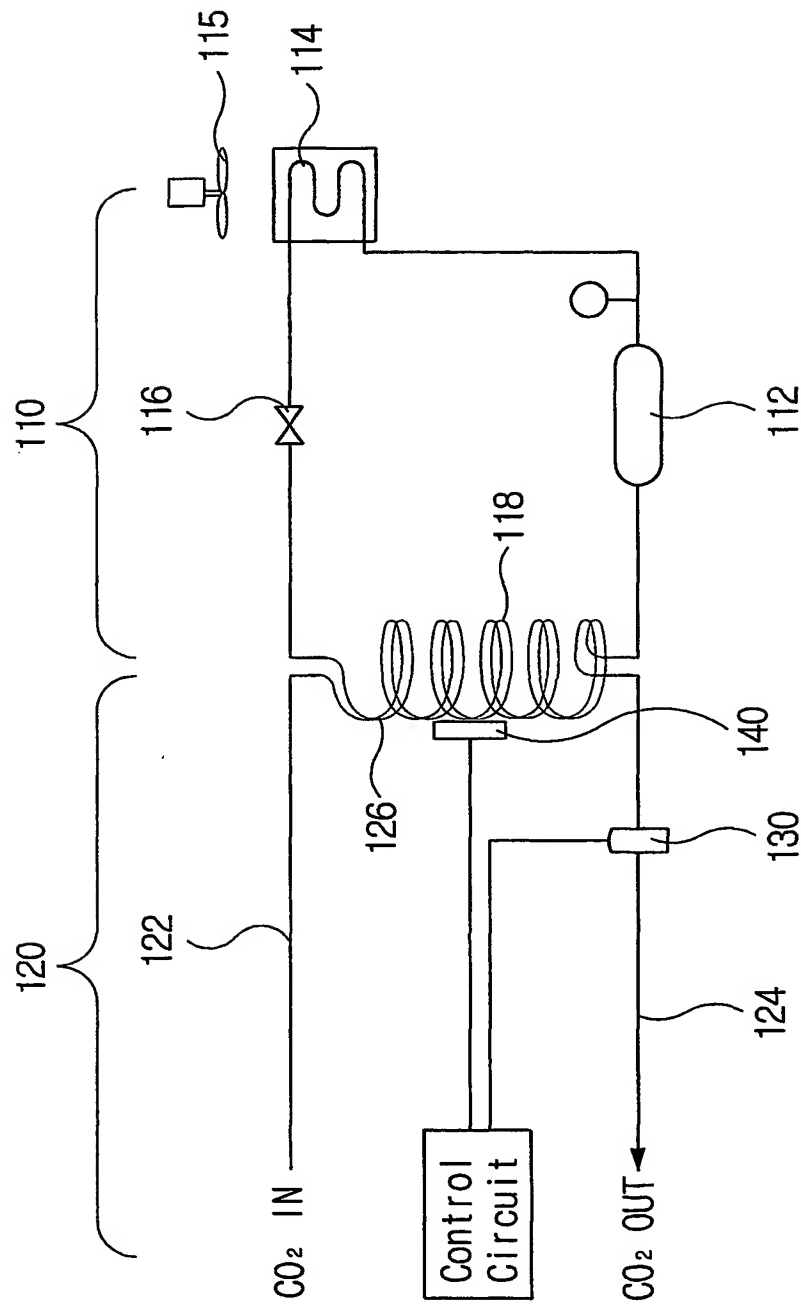

3 / 5

FIG.3

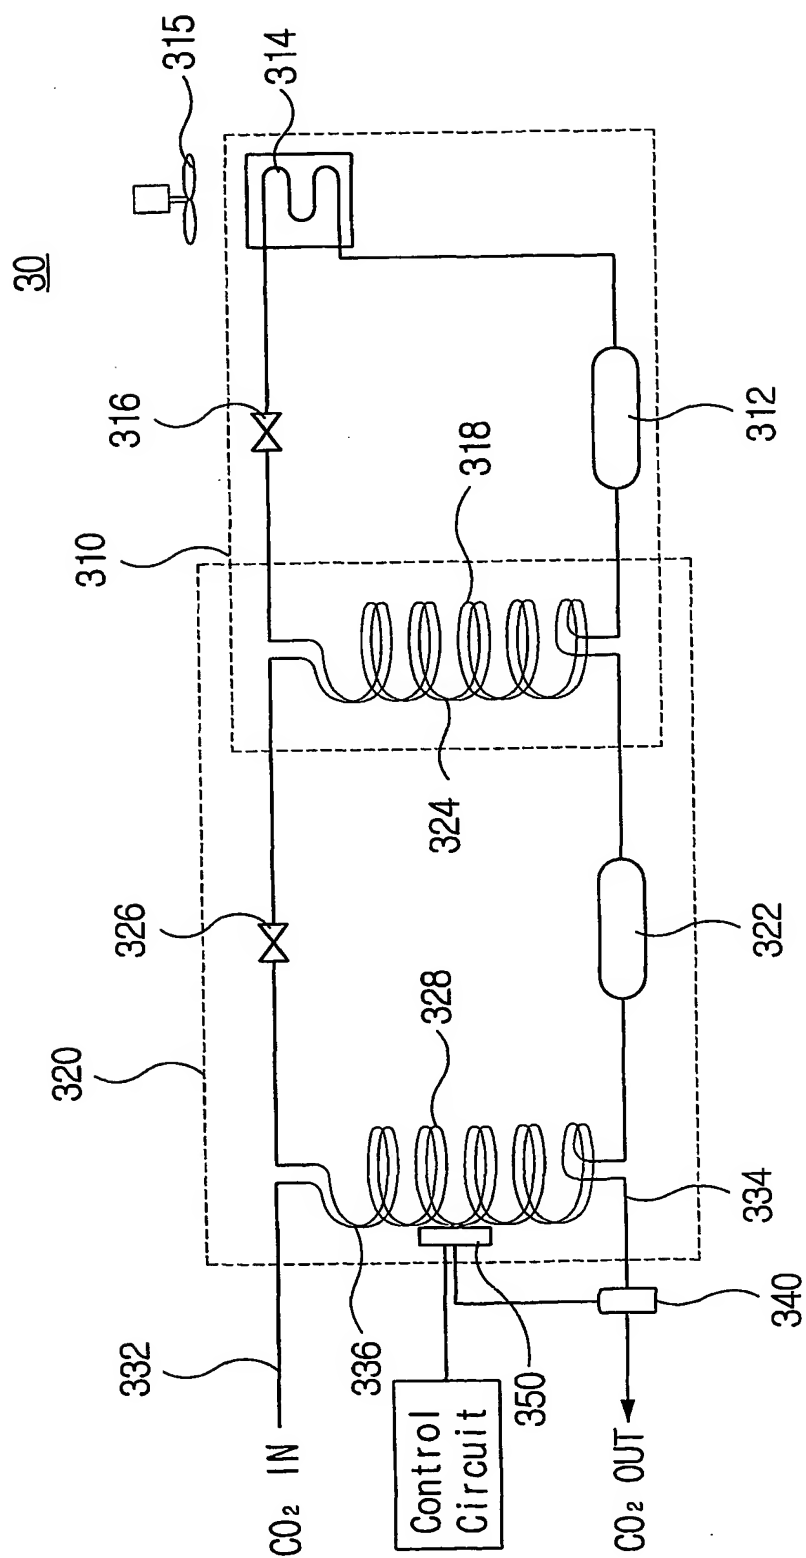

4 / 5

FIG.4a



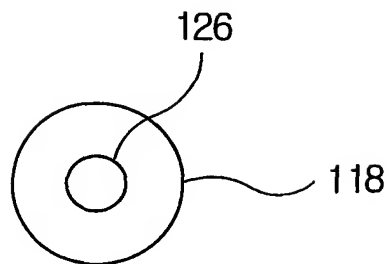


FIG.4b

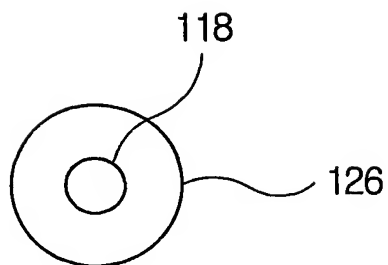

5 / 5

FIG.4c



INTERNATIONAL SEARCH REPORT

International application No.
PCT/01/01575

CLASSIFICATION OF SUBJECT MATTER

IPC⁷: B01F 3/06, B08B 4/00, B24C 1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC⁷: B01F, B08B, B24C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

DATABASE WPI on EPO

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5294261 A (MCDERMONT, W. et al.) 15 March 1994 (15.03.94) <i>figure, column 4 lines 25-58.</i>	1-12
A	US 5209028 A (MCDERMONT, W. et al.) 11 May 1993 (11.05.93) <i>column 3, line 6 - column 4, line 21.</i>	1-12
A	EP 0633098 A1 (INTERNATIONAL BUSINESS MACHINES CORPORATION) 11 January 1995 (11.01.95) <i>fig. 2, column 2, line 50 - column 3, line 16.</i>	1-12
A	EP 0332356 A2 (OSAKA SANSEI KOGYO LIMITED) 13 September 1989 (13.09.89) <i>the whole document.</i>	1-12
A	US 4631250 A (HAYASHI C.) 23 December 1986 (23.12.86) <i>description.</i>	1-12

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

„A“ document defining the general state of the art which is not considered to be of particular relevance

„E“ earlier application or patent but published on or after the international filing date

„L“ document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

„O“ document referring to an oral disclosure, use, exhibition or other means

„P“ document published prior to the international filing date but later than the priority date claimed

„T“ later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

„X“ document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

„Y“ document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

„&“ document member of the same patent family

Date of the actual completion of the international search

27 December 2001 (27.12.2001)

Date of mailing of the international search report

19 January 2002 (19.01.2002)

Name and mailing address of the ISA/AT

Austrian Patent Office

Kohlmarkt 8-10; A-1014 Vienna

Facsimile No. 1/53424/535

Authorized officer

SLABY

Telephone No. 1/53424/348

Form PCT/ISA/210 (second sheet) (July 1998)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/JP91/01575

Patent document cited in search report			Publication date	Patent family member(s)			Publication date
EP	A2	332356	13-09-1989	DE	C0	68906293	09-06-1993
EP	A3	332356	04-04-1990	DE	T2	68906293	12-08-1993
EP	B1	332356	05-05-1993	JP	A2	1225322	08-09-1989
				JP	B4	6022224	23-03-1994
				US	A	4972677	27-11-1990
EP	A1	633098	11-01-1995	DE	C0	69416204	11-03-1999
EP	B1	633098	27-01-1999	DE	T2	69416204	02-09-1999
				EP	A1	712691	22-05-1996
				EP	B1	712691	26-01-2000
				JP	A2	7016510	20-01-1995
				JP	B2	2739926	15-04-1998
				US	A	5377911	03-01-1995
US	A	4631250	23-12-1986	US	A	4747421	31-05-1988
US	A	5209028	11-05-1993	CA	AA	2093750	16-10-1993
				CA	C	2093750	09-03-1999
				EP	A1	569708	18-11-1993
				KR	B1	9603112	05-03-1996
				SG	A1	38864	17-04-1997
US	A	5294261	15-03-1994	JP	A2	6224172	12-08-1994
				JP	B2	2567341	25-12-1996

THIS PAGE BLANK (USPTO)